

Company introduction

ADSO Capacitor Co., Ltd is a set of capacitor research and development, production and sales in one of the specialized companies, aims to provide application solutions, excellent quality for power electronics industry products and high quality service.

ADSO Capacitor Co., Ltd has been specializing in metal film capacitors R & D and production , the company introduced the international advanced capacitor automated production equipment and high-precision testing instruments, built a set of complete infrastructure materials R & D, production, assembly, single module analysis, development of detection devices is equal to one, based on mature technology, the latest scientific research results, the use of advanced production technology and reasonable, standardized management and high quality efficient staff, forming a large-scale production capacity of strong product research, development and quality.

ADSO Capacitor Co., Ltd through a wide range of technical exchanges, actively participate in national and regional projects, relying on independent innovation, expert restart, the combination and the introduction of overseas advanced technology and other business model, the formation of a strong technical force, a high degree of specialization, strong ability in R & D, multidisciplinary "T" the team, also owns a number of invention and utility model patents, and in the famous expert driven, and cultivate a large number of high quality hard, technology professionals. Company's products are widely used in power electronic equipment electrical control system, the national grid power compensation circuit transformation system, motor variable frequency speed control system, the wind turbine controller system, photovoltaic inverter system railway system, transmission lines, new energy vehicles, energy saving and environmental protection equipment etc..

ADSO Capacitor Co., Ltd products quality, competitive price, short delivery cycle, and thoughtful service and industry reputation, mainly to provide OEM and ODM services well-known capacitor brand at home and abroad, the products are exported to all over the world. **ADSO** is **ADSO Capacitor Co., Ltd** under the independent brand, in Beijing, Shanghai, Nanjing, Wuhan, Xi'an and other offices or branches, and exported to the Americas, Europe, Australia, Asia and other developed countries and regions, initially set up a "in the Pearl River Delta as the basis, for the whole country, fan out from point to area global radiation", solid sales network. All the staff are trying to put the **ADSO** into a broad influence on the well-known brands.

ADSO Capacitor Co., Ltd to "market-oriented, quality of life, service demand development, the pursuit of" business philosophy, to "maximize meet customer demand" as the fundamental purpose, to professional service as the means, in order to promote the technical progress of the industry as our own duty, always pay attention to high quality product R & D and manufacturing of refine on, the pursuit of maximum the continuous progress and innovation, dedication to provide the best quality products and the most professional service for you.

Overview:

The DLC Series is a polypropylene metallized film with cylindrical aluminium can type filled with resin, screw terminals and plastic deck.

Application:

The DLC series is designed for DC-link applications.

The voltage 800VDC, Some typical examples of DC-Link applications are as follows: 380VAC converters and UPS, etc.


The voltage 1000VDC to 1200VDC, Some typical examples of DC-Link applications are as follows: SVG, wind power, solar power, High voltage converters, 690VAC mines converters, etc.

The voltage 1800VDC to 2000VDC, Some typical examples of DC-Link applications are as follows: High voltage converters, 1140VAC mines converters, SVG, etc.

Benefits:

- self-healing.
- Low losses.
- High ripple current.
- High capacitance density.
- Long lifetime.

Designs Data:

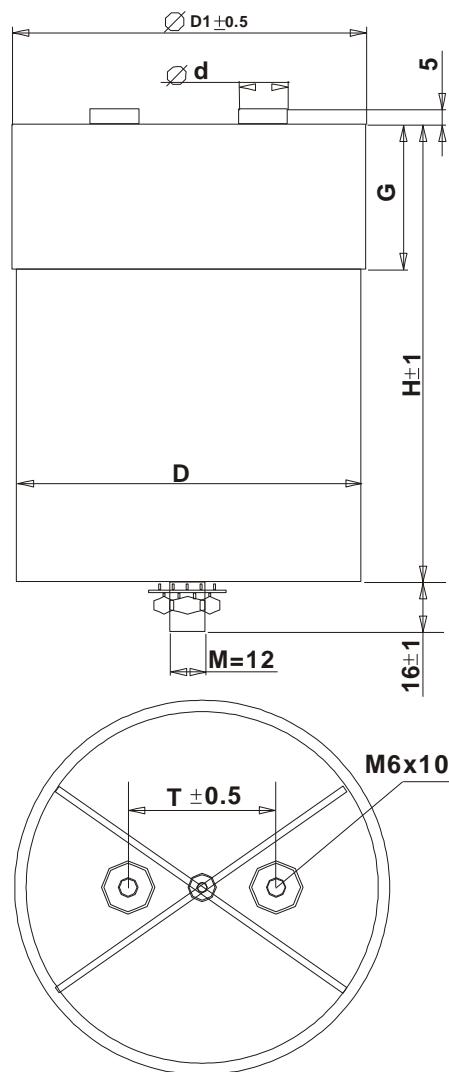

D	D1	T	G	d	K	L	Imax	Terminals
86	89	32	35	12	38	20		75A
116	119.5	50	40	15	53	35		100A
136	140	50	45	15	53	35		100A

DLC Series

Electrical data

Reference standards	IEC 61071 , IEC 60068 , UL 810,RoHS compliance
Standard capacitance tolerance	K: $\pm 10\%$
Dielectric dissipation factor ($\tan \delta$)	2×10^{-4}
Min/ Maximum temperature $\Theta_{\min}/\Theta_{\max}$	$-40\text{ }^{\circ}\text{C}/+70\text{ }^{\circ}\text{C}$
Storage temperature Θ_{stg}	$-40\text{ }^{\circ}\text{C} \dots +85\text{ }^{\circ}\text{C}$
Maximum hotspot temperature Θ_{hs}	$+70\text{ }^{\circ}\text{C}$
Climatic category	40/70/56
Permissible Relative Humidity	Annual average $\leq 70\%$; 85% on 30 days/year randomly distributed throughout the year. Dewing not admissible
Maximum altitude	2000 m above sea level(derating curves available upon request)
Expected lifetime	100 000 h at UNDC @ $\Theta_{\text{hs}} 70^{\circ}\text{C}$
Capacitance drop at end of life	-10% (typical)
Fit rate	50 (100 000 h at UNDC @ $\Theta_{\text{hs}} 70^{\circ}\text{C}$)
Test voltage between terminals	$U_{\text{TT}} = 1.5 \text{ UNDC}, 10\text{s}$
Test voltage between terminals and case	$U_{\text{TC}} \geq (1.5 \times \text{UNDC} + 1000) \text{ VAC}, 10\text{s}$
Dissipation factor $\tan \delta$ (100Hz)	$\leq 2 \times 10^{-3}$
Insulation Resistance	$R_i \times C \geq 10,000\text{s}$ at 100 VDC/1min at $+25^{\circ}\text{C}$
Impregnation Resin filling	Non PCB, dry type
Protection	Aluminium case with or without, threaded bolt M12 Plastic deck flame retardant execution UL 94 V-0 Thermosetting resin sealing UL 94 V-0 compliant
Cooling	Naturally air-cooled (or forced air cooling)
Degree of protection	Indoor mounting
Installation	Any position
Max. torque (case)	M12 stud 8 Nm
Max. torque terminal	Internal thread M6: 4 Nm; Threaded stud M8: 8 Nm
Can material	Aluminium, filled with resin
Lid	Plastic (UL 94 V-0)
Over-Voltage	$1.10 \times \text{UNDC}$ for maximum 8 Hour per day $1.15 \times \text{UNDC}$ for maximum 30 minimum per day $1.20 \times \text{UNDC}$ for maximum 5 minimum per day $1.30 \times \text{UNDC}$ for maximum 1 minimum per day $1.50 \times \text{UNDC}$ for 30 ms no more than 1000 times

U_{NDC} 800V	U_s 1200V	U_r 200V	U_{TT} 1200VDC/10s				U_{TC} 3000VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-800-550-0860	550	55	2.2	6.6	2.1	4.5	60	176	86	120	0.9
DLC-800-650-0860	650	75	4.6	13.7	0.9	4.0	45	208	86	144	1.0
DLC-800-800-0860	800	75	4.8	14.4	1.1	3.4	50	256	86	174	1.2
DLC-800-1000-1160	1000	75	4.0	12.0	1.3	3.4	60	320	116	124	1.7
DLC-800-1100-0860	1100	75	4.4	13.2	1.2	2.6	60	352	86	225	1.6
DLC-800-1400-1360	1400	80	5.6	16.8	1.1	3.0	60	448	136	125	2.3
DLC-800-1500-1160	1500	100	9.0	27.0	0.8	2.6	50	480	116	178	2.4
DLC-800-2000-1160	2000	100	8.0	24.0	0.9	2.1	60	640	116	228	3.0
DLC-800-2900-1360	2900	100	11.6	34.8	0.7	1.8	60	928	136	230	4.1
DLC-800-4400-1360	4400	100	17.6	52.8	0.6	1.3	60	1408	136	335	6.0

U_{NDC} 1000V	U_s 1500V	U_r 250V	U_{TT} 1500VDC/10s				U_{TC} 3500VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-1000-420-0860	420	55	2.1	6.3	2.3	4.5	60	210	86	120	0.9
DLC-1000-470-0860	470	75	4.2	12.7	1.0	3.9	45	235	86	144	1.1
DLC-1000-600-0860	600	75	4.2	12.6	1.2	3.3	50	300	86	174	1.3
DLC-1000-750-1160	750	70	3.8	11.3	1.5	3.4	60	375	116	124	1.7
DLC-1000-800-0860	800	75	4.0	12.0	1.4	2.6	60	400	86	225	1.6
DLC-1000-1100-1360	1100	75	5.5	16.5	1.1	3.0	60	550	136	125	2.3
DLC-1000-1500-1160	1500	100	7.5	22.5	0.9	2.1	60	750	116	228	3.0
DLC-1000-2100-1360	2100	100	10.5	31.5	0.8	1.8	60	1050	136	230	4.1
DLC-1000-3200-1360	3200	100	16.0	48.0	0.7	1.3	60	1600	136	335	6.0

U_{NDC} 1100V	U_s 1650V	U_r 250V	U_{TT} 1650VDC/10s				U_{TC} 3500VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-1100-350-0860	350	50	2.1	6.3	2.5	4.5	60	212	86	120	0.9
DLC-1100-420-0860	420	50	2.1	6.3	2.7	4.1	65	254	86	136	1.0
DLC-1100-420-D860	420	75	4.5	13.5	1.1	3.9	45	254	86	136	1.0
DLC-1100-420-086H	420	75	4.2	12.6	1.1	3.9	45	254	86	155	1.1
DLC-1100-500-0860	500	75	4.0	12.0	1.3	3.3	50	303	86	174	1.2
DLC-1100-600-1160	600	65	3.6	10.8	1.6	3.4	60	363	116	124	1.7
DLC-1100-680-0860	680	75	4.1	12.2	1.5	2.6	60	411	86	225	1.6
DLC-1100-730-1160	730	100	7.3	21.9	0.8	3.0	45	442	116	148	2.1
DLC-1100-900-1360	900	75	5.4	16.2	1.2	3.0	60	545	136	125	2.3
DLC-1100-900-1160	900	100	7.2	21.6	0.9	2.6	50	545	116	178	2.3
DLC-1100-1200-1160	1200	100	7.2	21.6	1.0	2.1	60	726	116	228	3.0
DLC-1100-1800-1360	1800	100	10.8	32.4	0.8	1.8	60	1089	136	230	4.1
DLC-1100-2600-1360	2600	100	15.6	46.8	0.7	1.3	60	1573	136	335	6.0
DLC-1100-3000-1360	3000	100	16	48	0.6	1.3	60	1815	136	335	6.0

DLC Series







U_{NDC} 1200V	U_s 1800V	U_r 300V	U_{TT} 1800VDC/10s				U_{TC} 3500VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-1200-470-0860	470	75	3.8	11.3	1.6	2.6	60	338	86	225	1.6
DLC-1200-550-1160	550	65	3.3	9.9	1.5	3.4	60	396	116	124	1.7
DLC-1200-600-0860	600	75	3.6	10.8	1.4	2.6	60	432	86	225	1.6
DLC-1200-750-1360	750	75	4.5	13.5	1.2	3.0	60	540	136	125	2.3
DLC-1200-800-1160	800	100	7.2	21.6	0.9	2.6	50	576	116	178	2.4
DLC-1200-1100-1160	1100	100	6.6	19.8	1.0	2.1	60	792	116	228	3.0
DLC-1200-1500-1360	1500	100	9.0	27.0	0.8	1.8	60	1080	136	230	4.1
DLC-1200-2300-1360	2300	100	13.8	41.4	0.7	1.3	60	1656	136	335	6.0

U_{NDC} 1800V	U_s 2700V	U_r 400V	U_{TT} 2700VDC/10s				U_{TC} 4000VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-1800-200-0860	200	60	3.2	9.6	1.6	3.4	50	324	86	174	1.2
DLC-1800-240-1160	240	55	2.9	8.6	2.1	3.4	60	389	116	124	1.7
DLC-1800-260-0860	260	75	3.1	9.4	2.0	2.6	60	421	86	225	1.6
DLC-1800-360-1160	360	100	5.8	17.3	1.1	2.6	50	583	116	178	2.4
DLC-1800-480-1160	480	100	5.8	17.3	1.3	2.1	60	778	116	228	3.0
DLC-1800-680-1360	680	100	8.2	24.5	1.0	1.8	60	1102	136	230	4.1
DLC-1800-1000-1360	1000	100	12.0	36.0	0.8	1.3	60	1620	136	335	6.0

U_{NDC} 2000V	U_s 3000V	U_r 450V	U_{TT} 3000VDC/10s				U_{TC} 4000VAC/10s				
Ordering code	Cn (μF)	I _{max} ^① (A)	I _{pk} (KA)	I _s (KA)	ESR (mΩ)	R _{th} (K/W)	L _s (nH)	W _n (Ws)	D (mm)	H (mm)	Weight (kg)
DLC-2000-160-0860	160	70	3.0	9.1	1.8	3.4	50	320	86	174	1.2
DLC-2000-220-0860	220	70	3.1	9.2	2.1	2.6	60	440	86	225	1.6
DLC-2000-300-1160	300	90	5.7	17.1	1.1	2.6	50	600	116	178	2.3
DLC-2000-400-1160	400	90	5.6	16.8	1.3	2.1	60	800	116	228	3.0
DLC-2000-550-1360	550	100	7.7	23.1	1.1	1.8	60	1100	136	230	4.0
DLC-2000-600-1360	600	100	11.4	34.2	0.8	1.7	50	1200	136	260	4.6
DLC-2000-800-1360	800	100	11.2	33.6	0.9	1.3	60	1600	136	335	6.0
DLC-2000-855-1360	855	100	11.5	34.5	0.9	1.3	60	1710	136	335	6.0

①.I_{max} @Θ_A 40 °C@10kHz, that lead to a ΔT of ~ 70°C in the hotspot, Θ_{hs} =Θ_A + ΔT.

Typical polypropylene dielectric characteristics

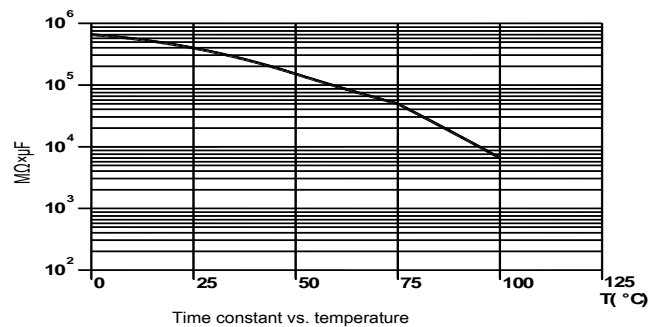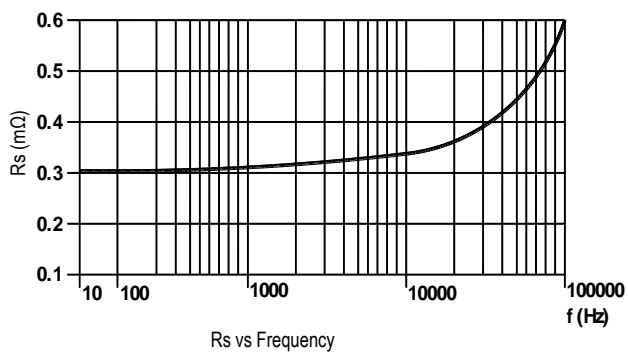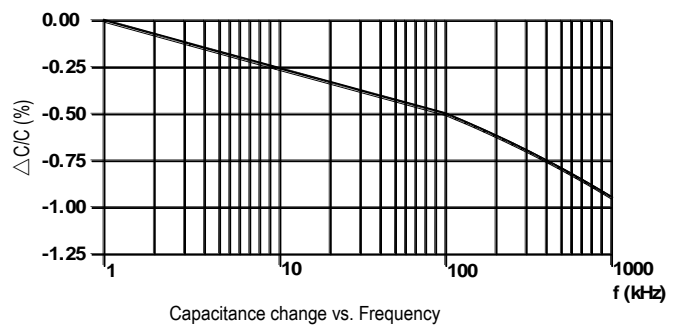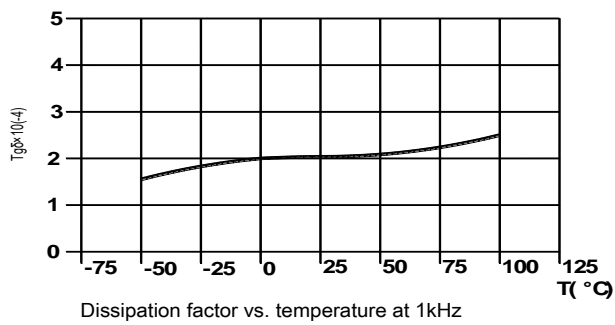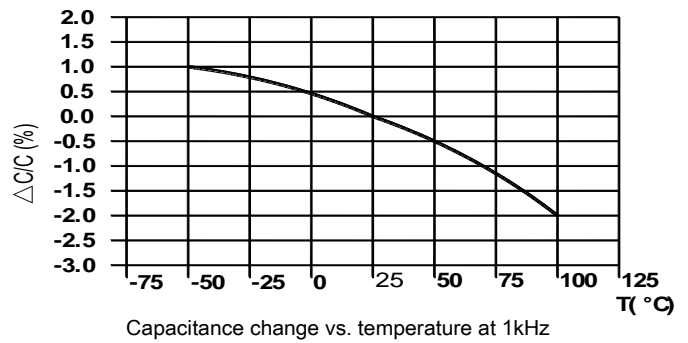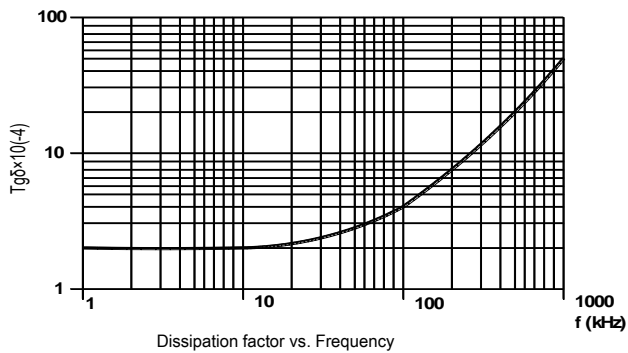

General Remarks

Rated capacitance C_N


Capacitance value rated at 20 °C / 50 Hz.

Rated AC voltage U_N

Maximum operating peak recurrent voltage of either polarity of a reversing type waveform for which the capacitor has been designed.

Rated DC voltage U_{NDC}

Maximum operating peak voltage of either polarity but of a non-reversing type waveform, for which the capacitor has been designed, for continuous operation.

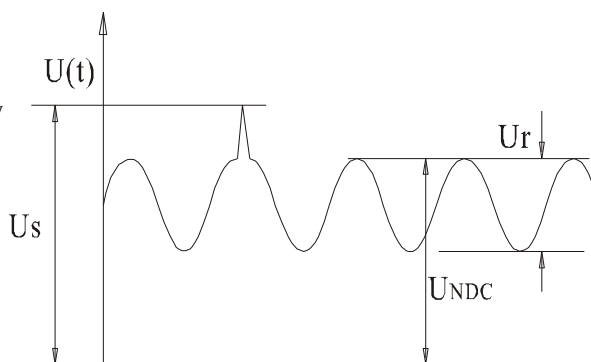

Ripple voltage U_r

Maximum value of the peak-to-peak alternating component of the unidirectional voltage. This value is stated only for DC-capacitors. The peak-to-peak value of AC- and AC/DC-types is always $2 \times U_{NAC}$.

Non-recurrent surge voltage U_s

Peak voltage induced by a switching or any other disturbance of the system which is allowed for a limited number of times and duration.


- Maximum duration: 50 ms / pulse. Maximum number of occurrences: 1000 (during load).

Insulation voltage U_i

Rms rated value of the insulation voltage of capacitive elements and terminals to case or earth.

rms voltage U_{rms}

Root mean square of max. permissible value of sinusoidal AC voltage in continuous operation. In power electronics, the RMS voltage is usually not the rated voltage value of the capacitor.

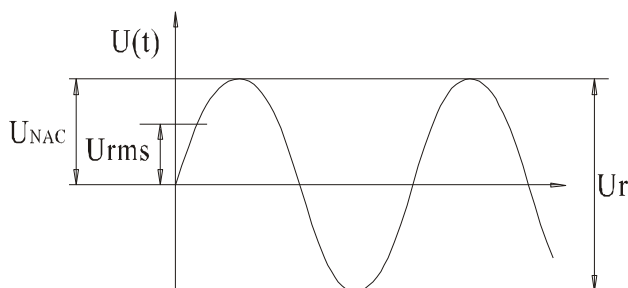

Maximum current I_{max}

Maximum rms current for continuous operation.

Maximum rate of voltage rise $(du/dt)_{max}$

Maximum permissible repetitive rate of voltage rise of the operational voltage.

Maximum peak current \hat{I}

Maximum permissible repetitive current amplitude during continuous operation.

Maximum peak current (\hat{I}) and maximum rate of voltage rise $(du/dt)_{max}$ on a capacitor are related as follows:

$$\hat{I} = C \times (du/dt)_{max}$$

Maximum non-repetitive rate of voltage rise $(du/dt)_s$

Peak rate of voltage rise that may occur non-repetitively and briefly in the event of a fault.

Maximum surge current \hat{I}_s

Admissible peak current induced by a switching or any other disturbance of the system which is allowed for a limited number of times (1000 times) and duration (50 ms / pulse).

$$\hat{I}_s = C \times (du/dt)_s$$

Ambient temperature Θ_A

Temperature of the surrounding air, measured at 10 cm distance and 2/3 of the case height of the capacitor.

Lowest operating temperature Θ_{min}

Lowest permitted ambient temperature at which a capacitor may be energized.

Maximum operating temperature Θ_{max}

Highest permitted capacitor temperature during operation, i.e. temperature at the hottest point of the case. It is, however, not sufficient to monitor the surface temperature. Life-span and safe operation crucially depend on the observance of the hotspot temperature.

Hot-spot temperature Θ_{hs}

Temperature zone inside of the capacitor at hottest spot. It has to be noted that, depending on the thermal power dissipation generated inside the capacitor, there is always a temperature difference between hotspot and surface. As the hotspot is usually not accessible for measurement, Θ_{hs} must be calculated based on the data stated in the catalogue or data sheet:

$$\Theta_{hs} = \Theta_A + I_{rms}^2 \times ESR \times R_{th}$$

Important: No thermal dissipation losses are admissible when operating a capacitor at an ambient temperature equal to the upper category temperature, i.e. I_{rms} and Q shall be zero (operation at pure DC voltage) !

Dielectric dissipation factor $\tan\delta_0$

Constant dissipation factor of the dielectric material for all capacitors at their rated frequency. The typical loss factor of pp film is $\tan\delta_0 = 2 \times 10^{-4}$.

Dissipation factor $\tan\delta$

Loss factor of the capacitor at sinusoidal ac voltage and applied frequency. It is calculated as follows:

$$\tan\delta(f) = \tan\delta_0 + R_s \times 2\pi f \times C_N$$

Series resistance R_s

The sum of all ohmic resistances occurring inside the capacitor.

Equivalent Series Resistance ESR

Represents the sum of all loss resistances occurring in the capacitor. It depends on frequency and is essential for the calculation of the capacitor's total power losses.

$$ESR = R_s + \tan\delta_0 / (2\pi f \times C_N)$$

Thermal resistance R_{th}

The thermal resistance indicates by how many degrees the capacitor temperature at the hot spot rises in relation to the dissipation losses.

Maximum power loss P_{max}

Maximum permissible power dissipation for the capacitor's operation.

$$P_{max} = (\Theta_{hs} - \Theta_A) / R_{th}$$

Self inductance L_s

The sum of all inductive elements which are contained in a capacitor.

Resonance frequency f_r

The lowest frequency at which the impedance of the capacitor becomes minimum.

$$f_r = 1 / (2\pi \sqrt{L_s \times C_N})$$

Rated energy contents W_N

Energy stored in the capacitor when charged at rated voltage.

$$W_N = 1/2 C_N \times U_N^2$$

Clearance in air L

The shortest distance between conducting parts of the terminals or between terminals and case. In this catalogue, we state only the shorter.

Creepage distance K


The shortest distance along an insulated surface between conducting parts of the terminals or between terminals and case. In this catalogue, again we state only the shorter.

DC Capacitor Expected life and Failure rate

DC capacitor Lifetime statements vs. Failure rate

In the lifetime expectancy graphic, statements for more than 200,000 hrs are cut off as they are technically unreasonable. For higher hotspot temperatures, no statements are made regarding operation at overvoltage: the simultaneous operation at limit values results in unpredictable conditions. Here, the statement of a FIT rate - that reflects the growing risk at such extreme conditions - would be of far better use.

DC capacitor Lifetime Expectancy Graphs

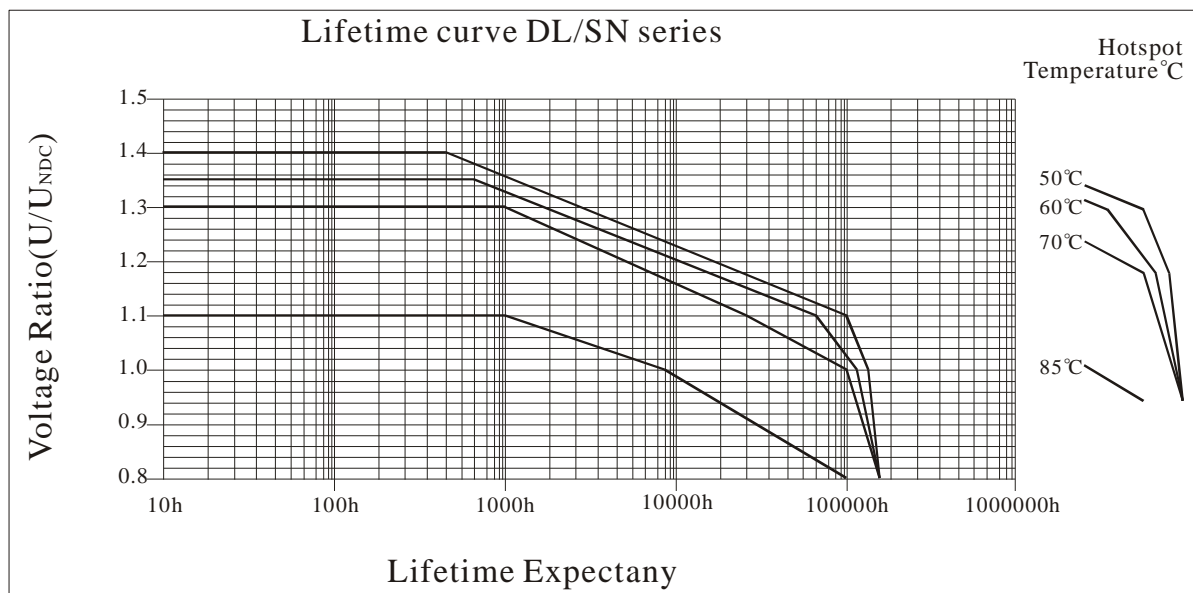

DC capacitor FIT rates (Failures In Time):

By reflecting the probability (in other words: risk) of failures during the operating period under selected operating conditions, it provides information on what effects to expect when de-rating (or over-loading) a capacitor. The failure probability of a component is a statistical value which is described by a log-normal distribution:

$$N = N_0 \times e^{-\lambda t}$$

N = number of functional components after period t

N_0 = total number of components at time $t = 0$

λ = failure rate

λ is the failure rate, which alternatively is also stated as the so-called FIT-rate (FIT = Failures In Time = $\lambda \times 10^9$). Service cycles may be calculated based on the so-called MTBF value (mean time between failures): $MTBF = 1/\lambda$. The failure rate is very closely linked with the operating temperature and the operating voltage applied to the capacitor. As standard, our FIT rates are related to a realistic (from a technical and statistical point of view) operating interval of $t=100,000$ hours, assuming a capacitor hotspot temperature of 70°C. Hotspot is the only reliable criterion in relation to the capacitor's temperature stress. The outside temperatures may be comparably low, however with high electrical stress the temperature rise in the capacitor may be substantial due to the power dissipation losses produced inside. This could result in the same temperature stress as a generally high ambient temperature.

DC Capacitor Expected life and Failure rate

The simultaneous operation of capacitors at highest permissible voltage and operating temperature should be avoided; otherwise, failure rates may increase beyond reasonable technical reliability.

In fact, a FIT rate of 50 would mean, for example: "If 10,000 capacitors are operated simultaneously for 100,000 hours at rated voltage and with a hotspot temperature of no more than 70 °C, then out of this batch no more than 50 pcs may fail during the entire period." Any period during which the hotspot temperature is lower than 70°C, or the voltage is less than rated voltage, will contribute to a reduction of the 50 FIT.

After the reference interval, the capacitors will continue operating; however the probability of failures may change. It shall be noted that the statements on FIT rates are based mainly on long-year empirical experience; at **ADSO**, we are conducting numerous and regular reliability tests to verify and back up our empirical knowledge. However dedicated studies designed to prove FIT rates would require the test of thousands of capacitors, over hundreds of thousands of hours, which is technically and commercially impossible. Even the use of statistical methods and accelerated ageing factors encounters physical and chemical limits.

Hence lifetime formulas such as


$$\text{Lifetime (U)} = \text{LN} \times (\text{U}_{\text{rated}}/\text{U}_{\text{working}})^8 \quad \text{and} \quad \text{Lifetime } (\Theta) = \text{LN} \times 2^{(\Theta_{\text{rated}}-\Theta_{\text{working}})/7}$$

should not be used to calculate absolute figures of expected lifetime. These rules and formulas are mainly designed to give an approximate feeling for the importance of voltage and temperature.

All standard items of **ADSO** are designed and dimensioned to comply with their FIT rate as stated in the catalogue or special data sheet. FIT rate statements related to longer reference intervals can be made on request. Further, capacitor designs can be adapted on request to achieve lower FIT at the intended operating conditions.

Based on our current state of knowledge derived from test data and experience, we quote the following FIT rates for our standard products at the a.m. conditions:

DC capacitor FIT rates Quota Graphs

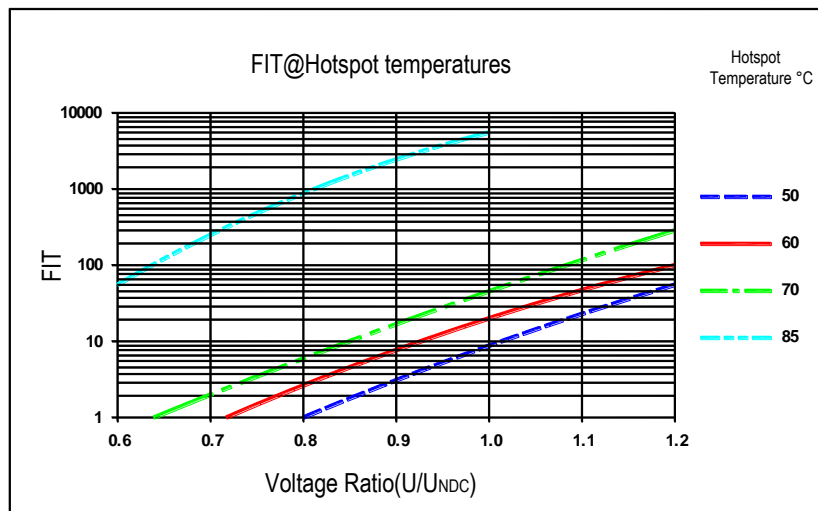

General Safety Advices

Cautions and warnings

- _ In case of dents of more than 1 mm depth or any other mechanical damage, capacitors must not be used at all.
- _ Check tightness of the connections/terminals periodically.
- _ The energy stored in capacitors may be lethal. To prevent any chance of shock, discharge and short-circuit the capacitor before handling.
- _ Failure to follow cautions may result, worst case, in premature failures, bursting and fire.
- _ **ADSO** is not responsible for any kind of possible damages to persons or things due to improper installation and application of capacitors for power electronics.

Safety

- _ Electrical or mechanical misapplication of capacitors may be hazardous. Personal injury or property damage may result from bursting of the capacitor or from expulsion of oil or melted material due to mechanical disruption of the capacitor.
- _ Ensure good, effective grounding for capacitor enclosures.
- _ Observe appropriate safety precautions during operation (self-recharging phenomena and the high energy contained in capacitors).
- _ Handle capacitors carefully, because they may still be charged even after disconnection.
- _ The terminals of capacitors, connected bus bars and cables as well as other devices may also be energized.
- _ Follow good engineering practice.

Thermal load

After installation of the capacitor it is necessary to verify that maximum hot-spot temperature is not exceeded at extreme service conditions.

Mechanical protection

The capacitor has to be installed in a way that mechanical damages and dents in the aluminum can are avoided.

Storage and operating conditions

Do not use or store capacitors in corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. In dusty environments regular maintenance and cleaning especially of the terminals is required to avoid conductive path between phases and/or phases and ground. The maximum storage temperature is 85 °C.

Service life expectancy

Electrical components do not have an unlimited service life expectancy; this applies to self-healing capacitors, too. The maximum service life expectancy may vary depending on the application the capacitor is used in.

The following applies to all products named in this publication:

1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, ADSO is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an ADSO product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”). Useful information on this will be found in our Material Data Sheets on the Internet. Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.